



Dimensions

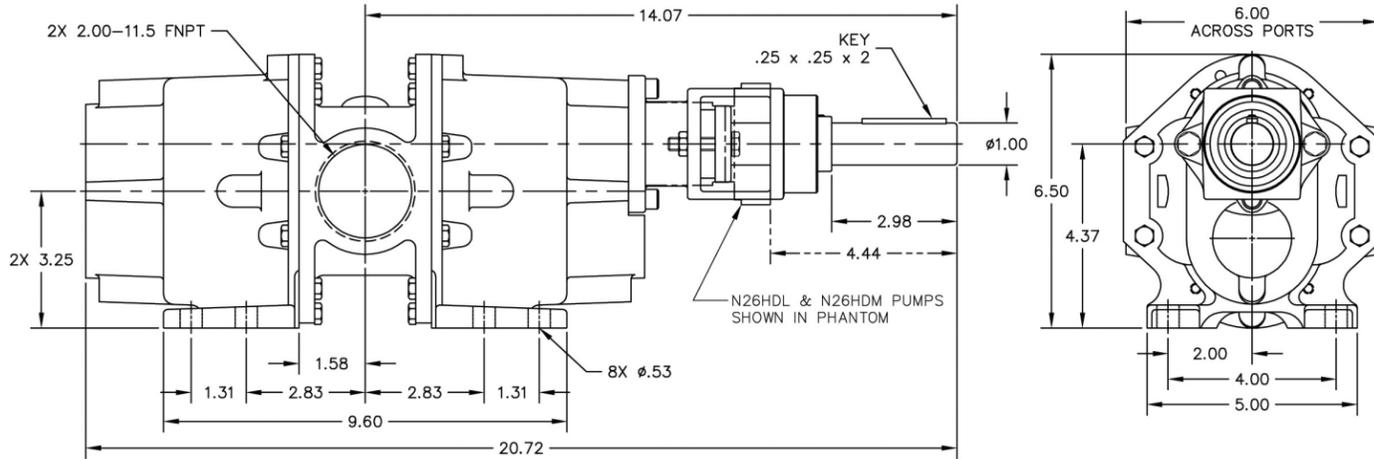

Port Size: 2" NPT

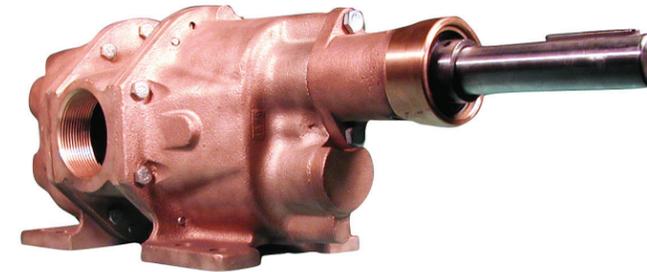

FEATURES:

- All Bronze Casting and Stainless Steel Shafts
- Sealing Arrangement Interchangeable in Field with Proper Kit
- Outboard Ball Bearing Support for Belt Drive Applications
- Self Lubricating Carbon Bearings

SERVICE WEAR FACTORS:

Speed - High speed accelerates wear. For longer service life keep speed as low as possible. Pump speeds above 900 RPM not recommended except for intermittent duty and pressures below 7 bar.

Pressure - High pressure accelerates wear. For longer service life keep pressure as low as possible.


Liquid Temperature - High temperature accelerates wear. Keep as close to room temperature as possible.

Liquid Contamination - Impurities like fine abrasive silt or sand accelerate wear. Keep liquid as clean as possible.

Liquid Lubricity - Lubricants increase service life many fold. Use lubricant additives whenever possible.

Noise - Large gear pumps are inherently noisy due to metal to metal gear contact. Make installations far removed from office or other relatively quiet people areas. Some noise reduction can be realized by lowering pump speed and use of isolation

PERFORMANCE:
CAPACITY WATER AT 70°F

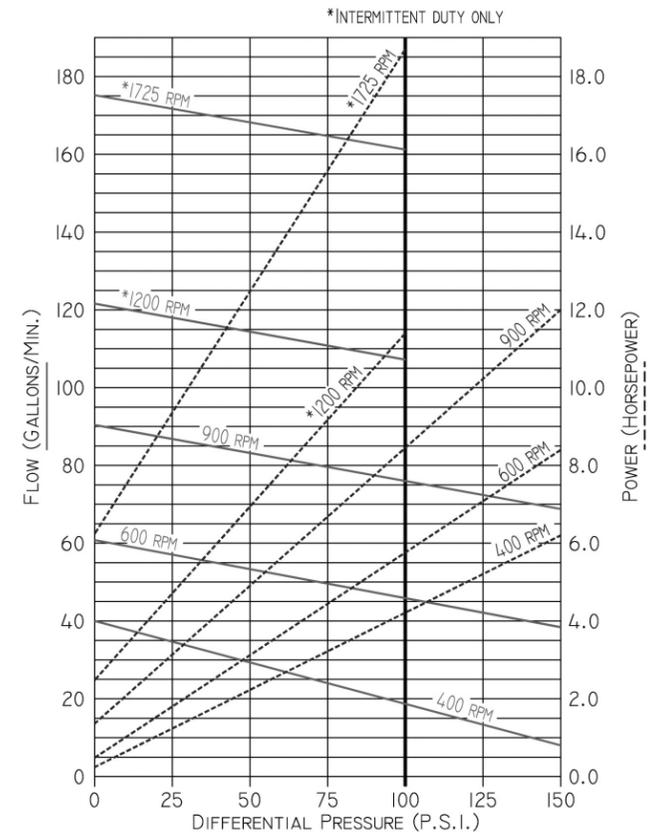

mounts and lines, usually the small amount of noise reduction achieved does not justify the effort and expense.

Drive & Alignment - Direct drive is the recommended drive arrangement. This pump is suitable for belt drive applications without needing pillow block earings to achieve acceptable pump life. Correct alignment is absolutely essential for satisfactory pump life. Recheck alignment after piping has been connected to the pump.

SEAL CONVERSION KITS

Seal conversion kits illustrated (on back) are designed for quick removal and replacement. In each case, seal housings are fastened to pump bodies by means of 2 bolts, item 13.

NBR = Acrylonitrile-Butadiene PTFE = Polytetrafluorethylene FKM = Fluoroelastomer



Visit www.oberdorferpumps.com to find in-depth descriptions of the world's leading high-quality, dependable pumps.

Due to ongoing product improvements, data shown here is subject to change without notice. Contact Oberdorfer Pumps for latest specifications.

Bronze Pedestal Rotary Gear Pumps

N26HD Series

	1	2	3	4	5	6A	6B	7	8	9	10	11	12	13
	Body Rear	Screw	Snap Ring	O-Ring	Bearing	Drive Gear	Idle Gear	Idle Shaft	Drive Shaft	Dowel Pin	Body Front	O-Ring	Packing Ring	Screw
Model	Qty. 1	Qty. 20	Qty. 6	Qty. 2	Qty. 8	Qty. 2	Qty. 2	Qty. 2	Qty. 1	Qty. 4	Qty. 1	Qty. 1	Qty. 4	Qty. 2
N26HDP	5220PN5N	5694	7651	9797-158	5108	9854	9855	7653	7571	8597	5220PN7N	6515	7624	5916
N26HDP-1	5220PN5N	5694	7651	9797-158	5108	9854	9855	7653	7571	8597	5220PN7N	6515	7450	5916
N26HDL	5220PN5N	5694	7651	9797-158	5108	9854	9855	7653	7571	8597	5220PN7N	9797-224	N/A	6827
N26HDLS3	5220PN5N	5694	7651	9797-158	5108	9854	9855	7653	7571	8597	5220PN7N	6515	N/A	6827
N26HDM	5220PN5N	5694	7651	9797-158	5108	9854	9855	7653	7571	8597	5220PN7N	6515	N/A	6827
N26HDMS7	5220PN5N	5694	7651	9797-158	5108	9854	9855	7653	7571	8597	5220PN7N	9797-224	N/A	6827
N26HDMS8	5220PN5N	5694	7651	9797-158	5108	9854	9855	7653	7571	8597	5220PN7N	6515	N/A	6827

	14	15	16	17	18	19	20	21	22	23	24	25	26	27	Repair Kit
	Nut	Gland	Screw	Seal Housing	Seal	Snap Ring	Ball Bearing	Key	Lip Seal	Seal Housing	Ring	Seal Assy	Tie Block	Tag	
Model	Qty. 2	Qty. 1	Qty. 2	Qty. 1	Qty. 1	Qty. 1 or 2	Qty. 1	Qty. 5	Qty. 1	Qty. 1	Qty. 1	Qty. 1	Qty. 1	Qty. 1	
N26HDP	8395	7451	9905	7449	6710	7372 (2)	7368	5957	N/A	N/A	N/A	N/A	2286	7737	11015
N26HDP-1	8395	7451	9905	7449	6710	7372 (2)	7368	5957	N/A	N/A	N/A	N/A	2286	7737	11016
N26HDL	N/A	N/A	N/A	N/A	N/A	7372 (1)	7368	5957	7262	7365	N/A	N/A	2286	7737	11017
N26HDLS3	N/A	N/A	N/A	N/A	N/A	7372 (1)	7368	5957	6500	7365	N/A	N/A	2286	7737	11018
N26HDM	N/A	N/A	N/A	N/A	N/A	7372 (1)	7368	5957	N/A	7365	7651	32315	2286	7737	11019
N26HDMS7	N/A	N/A	N/A	N/A	N/A	7372 (1)	7368	5957	N/A	7365	7651	32372	2286	7737	11020
N26HDMS8	N/A	N/A	N/A	N/A	N/A	7372 (1)	7368	5957	N/A	7365	7651	33335	2286	7737	TBD

Repair kit contains 3, 4, 5, 6, 7, 8, 11, 12, 18, 22, 24 & 25
Item 27 not depicted. * The sub-assembly part no. for the Tie Block with (4) 5108 bearings (item 5) installed is 32129.

IMPORTANT: Before attempting to remove a seal housing containing seal components by sliding them off the pump shaft, be sure to unlock 2 set screws locking the ball bearing inner race to the pump shaft. The ball bearing is identified as item 20. Also, before attempting to slide the seal housing from the pump shaft, remove all burrs, scale, and projections that could be formed by fretting corrosion.

Seal Conver. Kit No.	Pump Models	Seal Type	Materials
11021	N26HDP	Packing	Acrylic-Graphite
11022	N26HDP-1	Packing	PTFE
11023	N26HDL	Lip	FKM-PTFE
11024	N26HDLS03	Lip	NBR
11025	N26HDM	Mechanical	NBR-Ceramic
11026	N26HDMS07	Mechanical	FKM-Ceramic
TBD	N26HDMS8	Mechanical	EPDM

Exploded View

